


CIERRA PUERTAS

DIMENSIONS

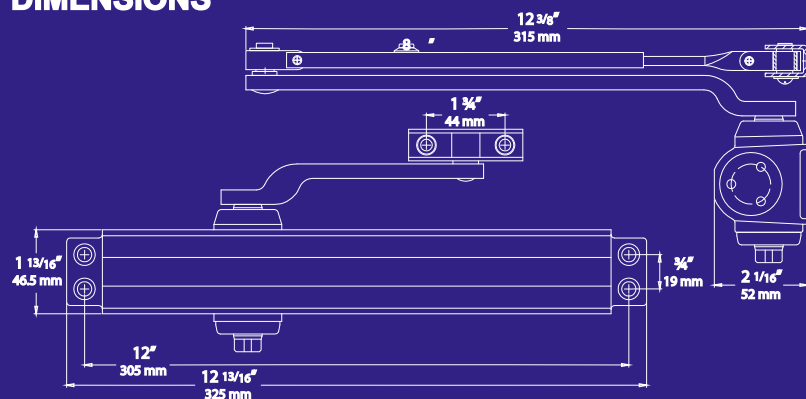

PRODUCT SPECIFICATIONS

- Meets ANSI 156.4 Grade 1
- UL / UL10C Listed, 3-Hour Fire Rating
- Compliant with ADA reduced opening force requirements
- Universal 12" Horizontal Mounting Hole Pattern
- Fully adjustable power size 1~6. Factory preset Size 3
- Independent Latch, Sweep, & Backcheck Intensity Valve
- Heavy Duty Rack & Pinion
- Heat treated High Tension Piston
- High lubricity hydraulic fluid to ensure smooth operation
- 6000-DA equipped w/ Delay Action feature
- Standard arm and parallel bracket included for regular arm, top jamb, and parallel arm applications
- Standard Arm Installation allows door to swing 180°
- Standard full cover
- Non-Handed

FRD

F8100 Series

Power Size 1-6

UL LISTED

**10 YEAR
WARRANTY**



6000 / 6000-DA SERIES MEDIUM-HEAVY DOOR CLOSER



RECOMMENDATIONS

DOOR CLOSER WEIGHT			MAXIMUM SIZE OF DOOR					
Series	Door Weight	Duty	Power Size	Regular Arm			Parallel Arm	
				Interior	Exterior Swing-In	Exterior Swing-Out	Interior	Exterior Swing-Out
6000	55-330 Lbs	Medium-Heavy	1	28"	N/A	N/A	N/A	N/A
			2	36"	N/A	N/A	30"	N/A
			3	42"	30"	36"	36"	30"
			4	48"	36"	42"	42"	36"
			5	54"	42"	48"	48"	42"
			6	60"	48"	54"	54"	48"

ITEM DETAILS

Model	WT/ CTN	WT/ CTN		Aluminum	Duro Bronze	Gold
6000 Series Door Closer with Standard Full Cover	44 Lbs.	4 Pcs	Item No.	606710	606711	—
6000 Series Door Closer with Delay Action (DA) & Standard Full Cover	44 Lbs.	4 Pcs	Item No.	606740	606741	606742

D-INOX®