


# CERRADURA CILINDRICA MANIJA MODELO CHARLOTTE RESIDENCIAL

## EL-60300

### CT (Charlotte)

### Entry

### US26D

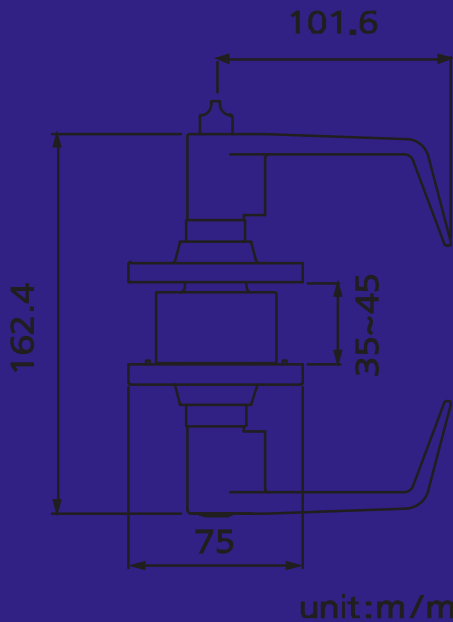

#### CERTIFICATION

**ANSI**  
ANSI/BHMA A156.2-2003 Grade 2 certified.

**UL**  
3 hours fire rating certified. UL File No. R13776.

#### SPECIFICATIONS

##### Exposed Trim

Wrought brass or stainless steel. Pressure cast zinc lever.

##### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.  
2" (51mm) optional.

##### Backset

Available in 2-3/8", 2-3/4", 3-3/4" or 5"  
backset. (60mm, 70mm, 95mm or 127mm)

##### Strike

9106. T strikes 1-1/8" x 2-3/4" x 5/64"  
(28.2mm x 69.5mm x 2.0mm) standard.  
9109. ASA Strike 1-1/4" x 4-7/8" x 3/32"  
(31.4 mm x 123.5mm x 2.4 mm) optional.

##### Latch

2-3/4" (70mm) standard.  
Faceplate : 1-1/8" x 2-1/4" (28.4mm x 57.0mm)  
square corner .  
1" x 2-1/4" (25.4mm x 57.0mm)  
faceplate also available.

Latch bolt : Stainless steel powder metallurgy  
latch bolt with 1/2" (12.7mm) throw.

##### Cylinder

6 pin solid brass cylinder. Schlage "C" Keyway  
standard.

Small Format Interchangeable Core cylinder  
also available.

(6/7 pin cylinder, Best "F" keyway)  
(for CH, SD and MH levers only)

#### MODELS

- EL60300 - OFFICE - MATE
- EL60362 - DEPOSIT - MATE
- EL60382 - PASSED - MATE
- EL60312 - CLASSROOM- MATE
- EL60330 - BATHROOMS - MATE

##### Door Handling

Universal, non-handing(except for QN lever).

##### Finishes

US3, US10B, US15, US26, US26D  
Other finishes are available upon request.

# D-INOX<sup>®</sup>