

CERRADURA CILÍNDRICA MANIJA

MODELO CHARLOTTE



EV-60300 - 1

CT (Charlotte)

#1 Type Rose

Entry

US26D

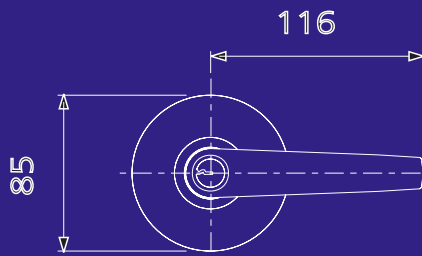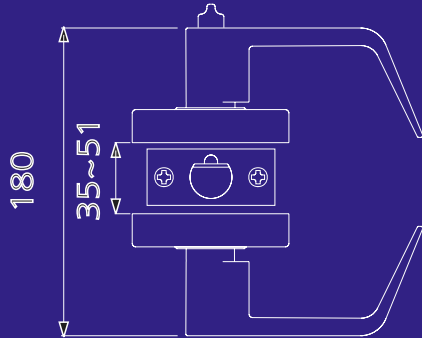

CERTIFICATION

ANSI
ANSI/BHMA A156.2-2003 Grade 2 certified.

UL
3 hours fire rating certified.

SPECIFICATIONS

Exposed Trim

Wrought brass. Pressure cast zinc lever.

Door Thickness

1-3/8" to 2" (35mm ~ 51mm) standard.

Backset

Available in 2-3/8", 2-3/4", 3-3/4" or 5" backset.
(60mm, 70mm, 95mm or 127mm)

Strike

9106. T strikes 1-1/8" x 2-3/4" x 5/64"
(28.2mm x 69.5mm x 2.0mm) standard.
9109. ASA Strike 1-1/4" x 4-7/8" x 3/32"
(31.4 mm x 123.5mm x 2.4 mm) optional.

Latch

2-3/4" (70mm) standard.
Faceplate : 1-1/8" x 2-1/4" (28.4mm x 57.0mm)
square corner .
1" x 2-1/4" (25.4mm x 57.0mm)
faceplate also available.
Latch bolt : Stainless steel powder metallurgy
latch bolt with 1/2" (12.7mm) throw.

Cylinder

6 pin solid brass cylinder. Schlage "C" Keyway
standard.
Small Format Interchangeable Core cylinder
also available.
(6/7 pin cylinder, Best "F" keyway)

MODELS

- EV80300 - OFFICE - MATE
- EV80362 - DEPOSIT - MATE
- EV80382 - PASSED - MATE
- EV80312 - CLASSROOM- MATE
- EV80330 - BATHROOMS - MATE

Door Handling

Non-handed levers.

Finishes

US3, US4, US10B, US15, US26, US26D
Other finishes are available upon request

D-INOX®