
# **CIERRA PUERTAS**

### **DIMENSIONS**



# FRD

F8900 Series

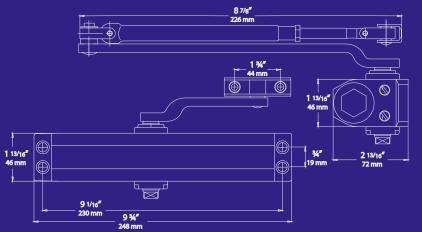

#### PRODUCT SPECIFICATIONS

- Meets ANSI 156.4 Grade 1
- UL / UL10C Listed, 3-Hour Fire Rating
- Compliant with ADA reduced opening force requirements
- 9-1/16" Horizontal Mounting Hole Pattern
- Fully adjustable power size 1~4, Factory preset Size 3
- Independent Latch, Sweep, & Backcheck Intensity Valve
- Heavy Duty Rack & Pinion
- Heat treated High Tension Piston
- High lubricity hydraulic fluid to ensure smooth operation
- Standard arm and parallel bracket included for regular arm, top jamb, and parallel arm applications
- Standard Arm Installation allows door to swing 180°
- Standard full cover
- Non-Handed



## LIGHT-MEDIUM DUTY DOOR CLOSER

RECOMMENDATIONS												
DOOR CLOSER WEIGHT			MAXIMUM SIZE OF DOOR									
Series	Door Weight	Duty	Power Size	Regular Arm			Parallel Arm					
				Interior	Exterior Swing-In	Exterior Swing-Out	Interior	Exterior Swing-Out				
4400	33-187 Lbs	Light-Medium	1	28"	N/A	N/A	N/A	N/A				
			2	36"	N/A	N/A	30"	N/A				
			3	42"	30"	36"	36"	30"				
			4	48"	36"	42"	42"	36"				

Model	WT/ CTN	WT/ CTN		Aluminum	Duro Bronze					
4400 Series Door Closer	GO I ha	10 Pcs	Item No.	604410	604411					
with Standard Full Cover	62 Lbs.									

